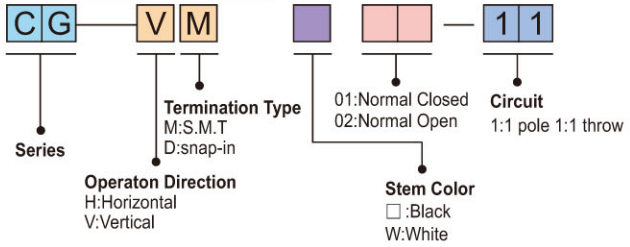




## HOW TO ORDER



### ◆ Features

- Low profile of 1.2mm height
- High reliability
- SMD Type

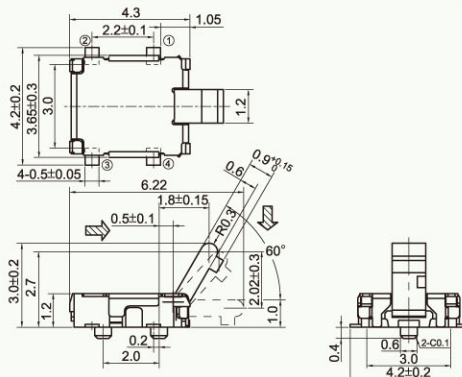

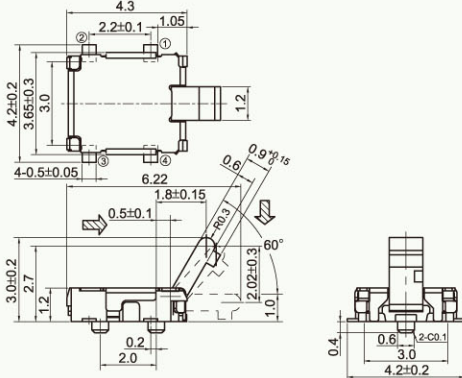

### ◆ Applications

- Digital Camera
- Camcorder Detection
- Mobile Phone
- ETC Switch

### ◆ SPECIFICATION

Items		Standard
Operating temperature range		-40℃ to +85℃
Electrical performance	Rating	1mA 5V DC Max. 1μA 3V DC Min
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	100V AC for 1 min.
	Contact resistance	3Ω max.
Durability	Lifetime	50,000 Cycles
Mechanical performance	Operating force	35 ± 10gf
	Travel	1.93 ± 0.5mm
Poles and Throws		1-pole 1-throw

### ◆ DIAGRAM

No.	Dimensions	Circuit Diagram
		PCB Layout
1	● CG-VM01-11 	
2	● CG-VM02-11 	

DETECTOR SWITCH