


B SERIES


4.0x6.1 Horizontal Push Tact Switch

TACT SWITCH

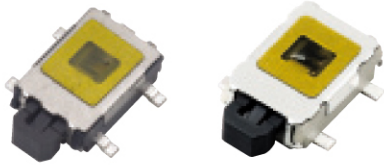

New

HOW TO ORDER

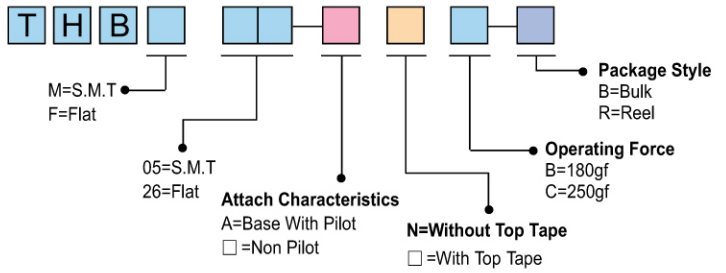

◆ FEATURES

- Compact size 4x4.7mm for high density mounting
- Horizontal Push type
- Reflow solderable
- Contacts sealed structure for high reliability

◆ APPLICATIONS

- Visual
- Audio
- Pro audio

◆ SPECIFICATION

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	B=200,000Cycles C=100,000Cycles
Mechanical performance	Operating force	B:180gf C:250gf
	Travel	0.30 ± 0.1mm

◆ DIAGRAM

No.	Dimensions	Circuit Diagram PCB Layout
1	<p>● THBM05</p>	
2	<p>● THBF26</p>	